

Our 'C Pumps' offer a non-blocking cutting action for demanding applications.


The hardened chopping impeller can make 3,000 cuts per minute using efficient motors and robust, reliable pumps. The Selprime® automatic self-priming system offers environmental benefits and the whole range is easy to operate and maintain.

Proven performance on

- ☞ Liquid conditioning
- ☞ Sludge
- ☞ Sewage
- ☞ Organic material
- ☞ Rags & fibres

Industries using Selwood's Chopper pumps include water & wastewater, industrial and food process.

An original Selwood product, our designs can come with a variety of motor sizes. Electric motors allow for permanent or temporary installation, with priming and non-priming versions. We also offer diesel self priming pumps for temporary applications.

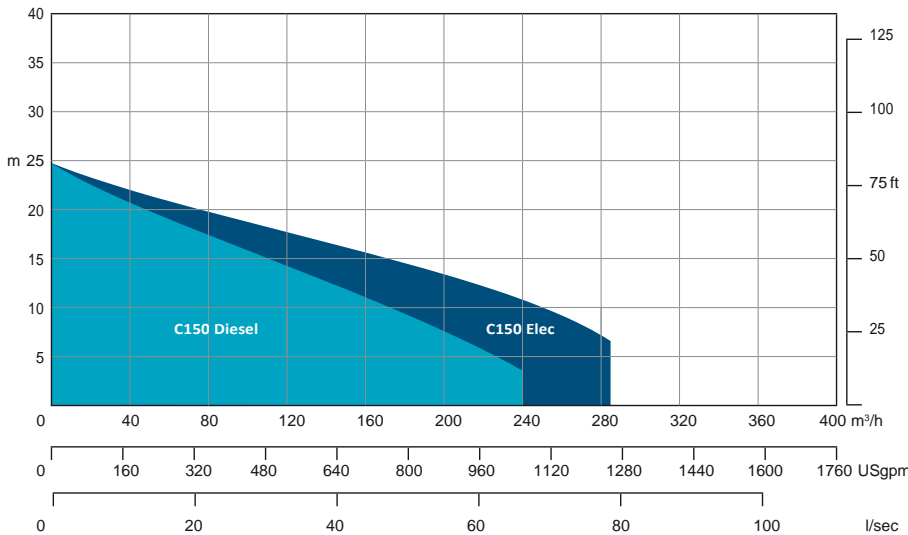

See appropriate data sheet for specific pump.

Model	Capacity m³/h	Total Head m	Solids Size mm	Self Priming Lift m	Air Handling l/s	Power Required kW	Pump Speed rpm	Inlet / Outlet mm
C150 Diesel	240	24.5	38	8.8	24	20	1800	150
C150 Electric	287	21	38	-	-	7.5	1440	150
C150 Electric Selprime	285	24	38	8.8	24	11	1440	150