

Chicago CP0020



H: Head feet (m)
Q: Flow imp gal/min (l/s)


General information

The sump pumps are of the centrifugal type, pumping fluid by means of an air driven impeller. The pump should be immersed in the liquid to be pumped. The liquid will leave the pump through the outlet port.

These pumps are designed for high performance and durability.

Both models will pump down to within only 7/8" (22 mm) from the base. They require no priming and can be run continuously, or even run dry, without overheating. They can be totally submerged, using a non-return valve on the exhaust pipe or an extended pipe ending above the level of the liquid.

The pumps can be used in places where abuse and rough use are inevitable or acceptable in terms of increase in productivity. They are relatively small in size with a very large capacity and thus can be used in confined spaces.

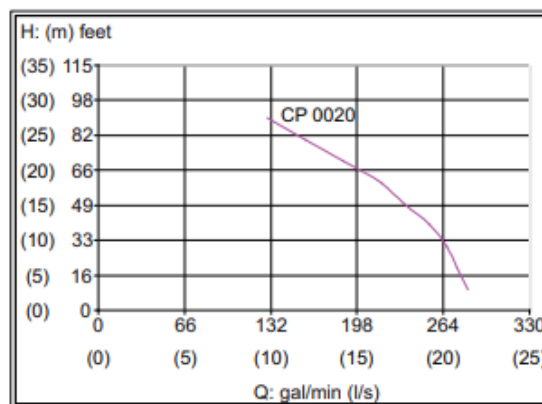

		CP 0020
Power	kW	2,9
Weight	kg	30,5
Min opening needed	mm	230x240
Min water depth	mm	22
Max suction lift	m	-
Max head	m	27,4
Air consumption	l/s	51
Air inlet	inch	3/4" NPT
Air outlet	inch	1 1/4" NPT
Discharge inlet	inch	-
Discharge outlet	inch	2 1/2" BSP
Max solid content		-



AmoraSub

www.amorasub.pt

Parque Industrial S. Marta
de Corroios
Rua Manuel Ribeiro, Lote 13
2845-409 Amora - Portugal

T +351 919 708 279
E geral@amorasub.pt