

INGERSOLL RAND K6U



Specifications

Model	K6U
Power type	Air
Brake type	Manual ext. band brake
Weight	596 kg (No cable)
Line pull (Nominal capacity)	4536 kg
Line speed	17 m/min
Drum root diameter	324 mm (12 3/4")
Wire rope diameter	16 mm (5/8"), 19 mm (3/4"), 22mm (7/8")
Rope anchor hole diameter	25 mm (1")
Motor	24 hp
Avg. CFM required	600
Full drum capacity	218 m (16mm wire rope) 163 m (19mm wire rope) 114 m (22mm wire rope)
Drum length	300 mm (12")
Max stall pull (First layer @6.3 bar)	6804 kg

Recommended working length is 80% rope capacity




AmoraSub

www.amorasub.pt

Parque Industrial S. Marta
de Corroios
Rua Manuel Ribeiro, Lote 13
2845-409 Amora - Portugal

T +351 919 708 279
E geral@amorasub.pt

Dimensions

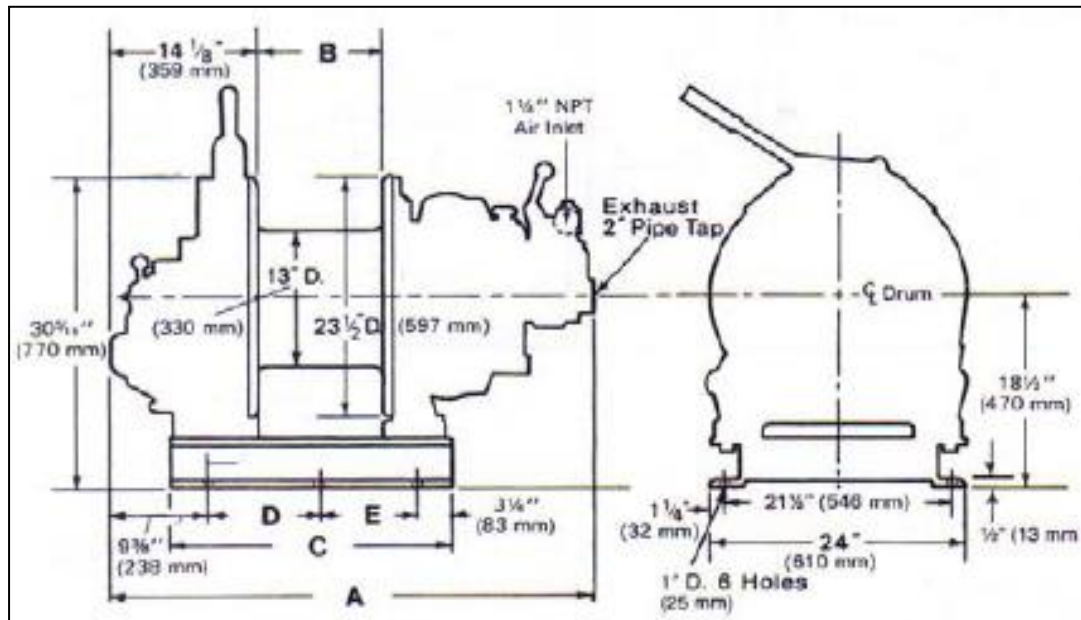

- A - 1181 mm (46 1/2")
- B - 305 mm (12")
- C - 683 mm (26 7/8")
- D - 273 mm (10 3/4")
- E - 235 mm (9 1/4")



AmoraSub

www.amorasub.pt

Parque Industrial S. Marta
de Corroios
Rua Manuel Ribeiro, Lote 13
2845-409 Amora - Portugal

T +351 919 708 279
E geral@amorasub.pt